

# Lithium Iron (LiFePO<sub>4</sub>) Battery

#### Features


**Longer Cycle Life :** Offer up to 10 times longer cycle life and five times longer float/calendar life than lead acid battery, helping it minimize replacement cost and reduce total cost of ownership.

**Lighter Weight :** About 40% of the weight of a comparable lead acid battery. A'drop in' replacement for lead acid batteries.

**Higher Power :** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

#### Wider Temperature Range : -20~60°C

**Superior Safety :** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

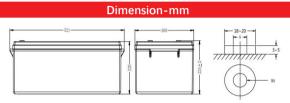

## ALFP-48100(51.2V 100Ah)



#### Application

- Solar/Wind energy Storage
- Golf cart
- Back-up Power for UPS/EPS
- Tools

Specification		
Basic Parameters	Rated Voltage	51.2V
	Rated Capacity	100Ah
	Rated Energy	5120wh
	Internal Resistance ( AC )	≤50mΩ
	Cycle Life	≥3500 cycles @80%DOD
	Self Discharge	1%/months
	Efficiency of Charge	≥97%
	Efficiency of Discharge	≥98%
Charge	Charge Voltage	57.6V
	Charge Current (Recomm.)	20A
	Charge Current (Max.)	100A
Discharge	Discharge Cut-off Voltage	43.2V
	Discharge Current(Recomm.)	50A
	Pulse Current	120A(3S)
Environmental	Charge Temperature	0°C to 60°C
	Discharge Temperature	-20°C to 60°C
	Humidity	5% to 95%
Physical Characteristics	IP Class	IP30
	Terminal	M8
	Plastic Case	ABS
	Dimensions ( in. /mm. )	522*240*218mm
	Weight ( lbs. /kg. )	36.5kg
	Others( optional )	Bluetooth,Shell color,IP rating









# Lithium Iron (LiFePO<sub>4</sub>) Battery ALFP-48100(51.2V 100Ah)


Different Temperature Discharge Curve(0.5C)

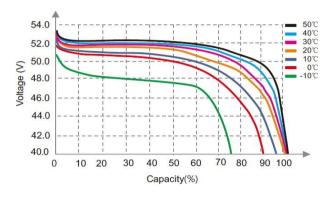

### Charging Characteristics (0. 2C, 25°C)

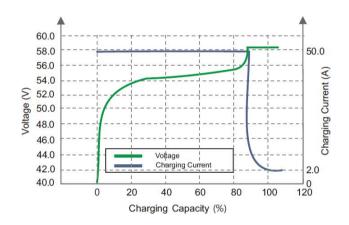


### Different Temperature Self Discharge Curve

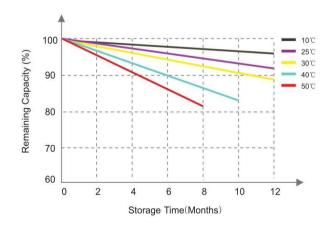



© 2024 AOKLY GROUP. All rights reserved. Trademarks and logos are the property of AOKLY GROUP and its affiliates unless otherwise noted.Subject to revisions without prior notice.

Different Rate Discharge Curve(25°C)

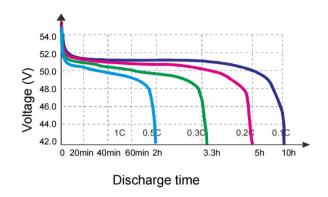

State of Charge Curve (0. 2C, 25°C)

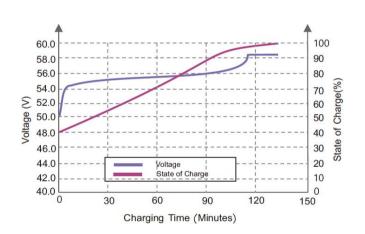

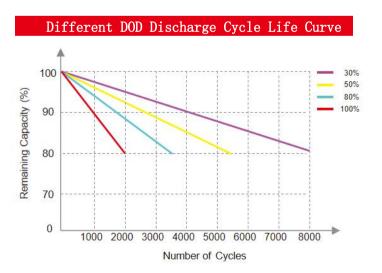



Add: High-tech Industrial Development Zone, Yingde City, Guangdong Province, China Web: www.aokly-battery.com Email: sales@aokly-battery.com